Push Latch

Effortless Touch Opening System for Doors and Drawers

門與抽屜的按壓彈開系統(拍拍手)

Works with standard concealed hinges and drawers

可用於抽屜與門片鉸鏈

Positioning
定位



Close to the 'touch opening' point on the side opposite to hinges
鉸鏈的對面靠近
按壓打開處



On the cabinet side; gap between drawer and cabinet side = min 12mm
在側板上
側板與抽屜最小縫隙為12mm

Available with linear and cross mounting plate

有一字型和十字型底座可選擇



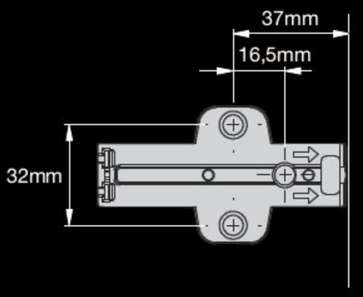

Depth adjustment feature

觸動彈開可調整

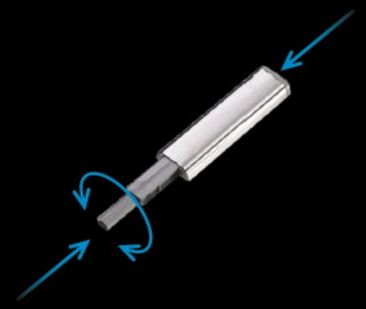

Depth adjustment +4,5/-1mm
深度調整+4.5/-1mm



Minimum gap required
最小縫隙需求

Titus

Push Latch

For wooden doors and drawers





	Item number	Bronze
Push latch	915-0X59 →	381
Cross m. plate	915-4183 →	381
Linear m. plate	915-4175 →	381

Push latch

Push latch

915-0X59-381-K1

200 Sets

915-0X59-381-K2

200 Sets

Cross mounting plate

Linear mounting plate

200 Pcs

Made of steel and plastic

Fixing screws for mounting plates



Euro screws
821-6323-050

10000 Pcs



Chipboard screws

- Works with standard concealed hinges and drawers
- Effortless opening with just a light touch
- Depth adjustment ensures reliable closing and consistent performance in cases of inaccurate drilling
- 'Safety click' feature for easy detachment of the mechanism from the mounting plate

Drilling pattern

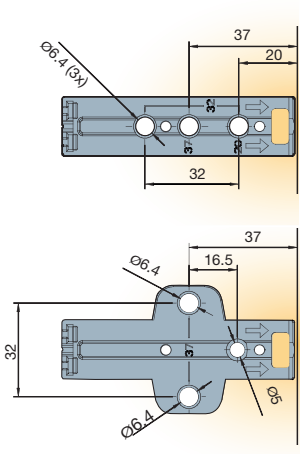

Dimensions

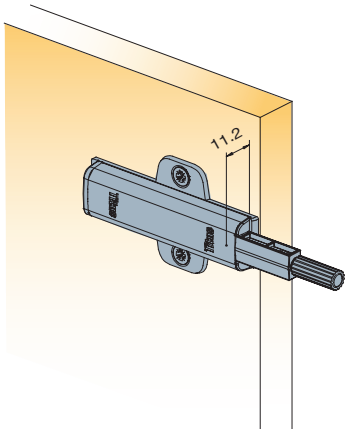

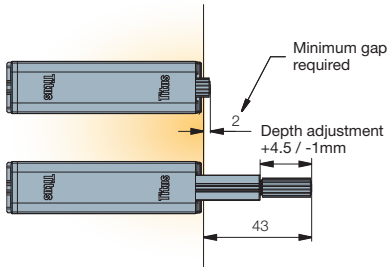

Positioning



Close to the 'touch opening point' on the side opposite to hinges



On the cabinet side; gap between drawer and cabinet side = min 12mm



On the drawer bottom; in the middle of drawer

Push latch works with standard hinges.

Push latch works on drawer; the gap between the drawer and the cabinet side = min. 12 mm